VAN MOUNTED PLATFORM


## Telescopic boom with jib

# Electro-hydraulic proportional controls with automatic load/outreach optimisation

- Two hydraulic stabilisers, independent control from cab
- 'Stabilisers set' and 'Ready for travel' indicator lights
- Stabiliser / boom interlocks
- Engine stop/start at platform and base controls
- Electro-hydraulic base controls on wander lead
- 'PTO engaged' and 'Stabilisers not retracted' warning
- 12V DC emergency power pack & hydraulic hand pump
- 'Duck under' GRP platform with 2 x harness points
- Booms painted yellow RAL 1023 with white platform and knuckle



SPECIFICATIONS	
Maximum working height	14.3m
Maximum platform floor height	12.1m
Maximum working outreach	9.2m
Maximum SWL in platform	250kg
SWL at maximum outreach	120kg
Jib articulation	110°
Turret rotation	365°
Vehicle	Iveco Daily 50C H2 Roof
GVW	5200kg
Wheelbase	3520mm (L)
Approx. spare payload with	
2 crew and full fuel tank	1580kg

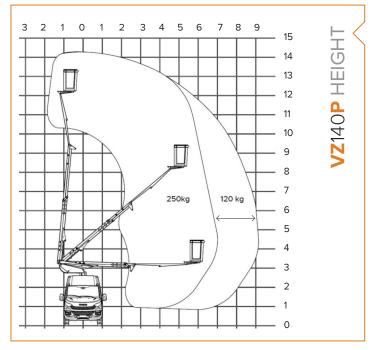





### FOR SALES, PARTS & SERVICE

### Access Platform Sales Ltd

Shropshire House Hortonwood 1 Telford Shropshire TF1 7GN UK T 0845 108 4000 F 01480 891 162

E sales@iapsgroup.com iapsgroup.com