


Specifications

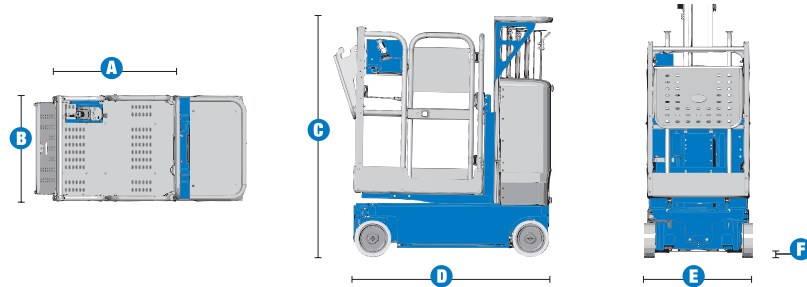

MODELS	QS™-12		QS™-15		QS™-20	
MEASUREMENTS	US	Metric	US	Metric	US	Metric
Working height*	17 ft 5 in	5.48 m	20 ft 8 in	6.47 m	25 ft 11 in	8.07 m
Platform height	11 ft 5 in	3.48 m	14 ft 8 in	4.47 m	19 ft 11 in	6.07 m
A B Platform dimensions (length x width)						
With tray down	35 x 28.75 in	.89 x .73 m	35 x 28.75 in	.89 x .73 m	35 x 28.75 in	.89 x .73 m
With tray up	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m
C Height - stowed	5 ft 2 in	1.57 m	5 ft 2 in	1.57 m	6 ft 6 in	1.98 m
D Length - stowed	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m
E Width	2 ft 5.5 in	.75 m	2 ft 5.5 in	.75 m	2 ft 7.5 in	.80 m
F Ground clearance - center	2.5 in	.06 m	2.5 in	.06 m	2.5 in	.06 m

PRODUCTIVITY						
Lift capacity	500 lbs	227 kg	500 lbs	227 kg	350 lbs	159 kg
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability**	30%		30%		30%	
Turning radius - inside	zero		zero		zero	
- outside	4 ft 7 in	1.42 m	4 ft 7 in	1.42 m	4 ft 7 in	1.42 m
Raise / lower speed	20 / 18 sec	20 / 18 sec	21 / 19 sec	21 / 19 sec	24 / 21 sec	24 / 21 sec
Controls	24V DC proportional		24V DC proportional		24V DC proportional	
Tires - solid non-marking	10 x 3 x 8 in	25 x 8 x 20 cm	10 x 3 x 8 in	25 x 8 x 20 cm	10 x 3 x 8 in	25 x 8 x 20 cm

POWER						
Power source	24V (four 6V 200 Ah maintenance-free batteries)					
Hydraulic system capacity	2.2 gal		8.33 L			

WEIGHT***						
Retail (R) configuration	1,609 lbs	730 kg	2,220 lbs	1,007 kg	2,479 lbs	1,124 kg
Warehouse (W) configuration	1,581 lbs	717 kg	2,192 lbs	994 kg	2,451 lbs	1,112 kg

STANDARDS COMPLIANCE	ANSI A92.6, CSA B354.2, CE Compliance					
----------------------	---------------------------------------	--	--	--	--	--

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.
 *** Weight will vary depending on options and/or country standards.