

# nifty



# 150T

## TRAILER MOUNTED ACCESS PLATFORM



**14.70m (48ft 3in)**

Working height

**7.53m (24ft 8in)**

Working outreach

**Telescopic Upper Boom**

Greater accuracy when  
positioning platform

**Bi-Energy**

Optimising utilisation

**Hydraulic Outriggers**

For quick and easy setup

**Fully Proportional  
Hydraulic Controls**

Simple, reliable & easy to maintain

**Traction Drive Option**

For improved manoeuvrability  
on site



[niftylift.com](http://niftylift.com)



# nifty 150T

Developed specifically to maximise outreach, the Nifty 150T delivers an unrivalled working envelope, especially at low levels where outreach is needed most. Compact dimensions coupled with hydraulically operated outriggers make manoeuvring and setting up the 150T quick and simple, while its 1.4m wide platform provides the operator plenty of room in which to work. Fully proportional hydraulic controls make operating and maintaining the 150T easy, minimising both downtime and running costs.

## SAFETY FEATURES

- Cage Overload Sensing
- Outriggers with Audible and Visible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- CE Mark



The 150T offers an up-and-over clearance of more than 5.6m allowing it to reach easily over larger obstacles such as walls and buildings.

Fully proportional controls and a spacious platform make the 150T simple to operate with both speed and accuracy.





## SPECIFICATIONS

<b>Working Height</b>	14.70m	48ft 3in
<b>Platform Floor Height</b>	12.70m	41ft 8in
<b>Working Outreach</b>	7.53m	24ft 8in
<b>Slew</b>	400°	
<b>Width - Travelling</b>	1.60m	5ft 3in
<b>- Working</b>	3.80m	12ft 6in
<b>Height - Overall</b>	2.00m	6ft 7in
<b>Length - Overall</b>	5.55m	18ft 3in
<b>Weight</b>	1,750kg*	3,868lbs*
<b>Platform Capacity</b>	225kg	500lbs
<b>Platform Size</b>	1.40m x 0.70m	4ft 7in x 2ft 4in
<b>Control System</b>	Fully Proportional Hydraulic	
<b>Power System</b>	Bi-Energy (petrol & battery)	
	Mains Only**	
	Battery Only**	
	Petrol or Diesel Only**	
<b>Drive Option</b>	Traction Drive**	

\* Weights may vary according to specification / power options, please confirm before ordering.

\*\* Options not currently available but will be in future, please check with Niftylift for release dates.

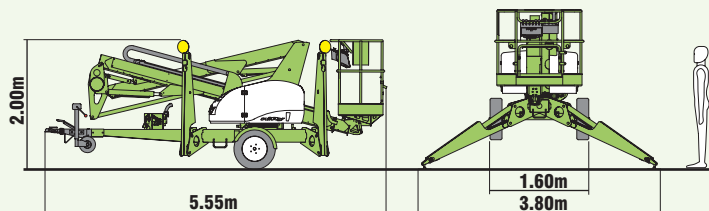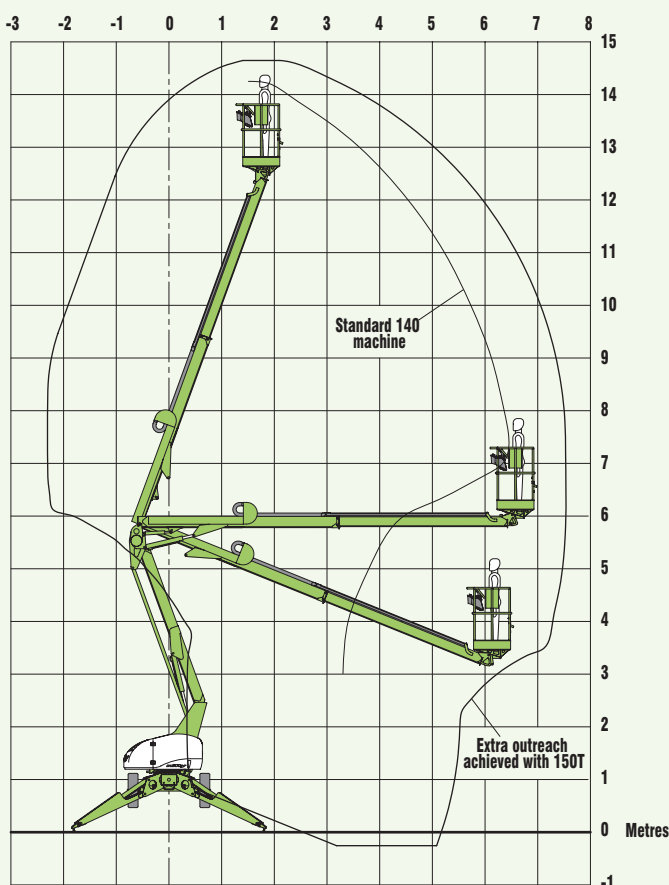

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

Manufacturers of trailer mounted,  
self propelled and vehicle mounted platforms.

**NIFTYLIFT LTD**  
Fingle Drive  
Stonebridge  
Milton Keynes  
MK13 0ER  
England

www.niftylift.com

e-mail: info@niftylift.com  
Tel.: +44 (0) 1908 223456  
Fax.: +44 (0) 1908 312733

