

TRAILER MOUNTED ACCESS PLATFORM



9.50m (31ft 2in)
Working height

3.50m (11ft) Working outreach

Fully Proportional Hydraulic Controls

Simple, reliable & easy to maintain

Compact Outriggers

For setup in confined areas

Weight Saving Chasis Design

Easily towed on the road & manoeuvred on site

Telescopic Axle

Access through single doorway openings












The Nifty 90 is the ideal alternative to ladders and scaffolds. Its compact design allows it to set up in the most confined spaces. The telescopic axle allows it to pass through single doorways and its simple, reliable hydraulic controls make even first time operation straightforward.

SAFETY FEATURES

- Pressure Sensitive Outriggers
- **Audible Alarms**
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Hand Brake (Option)
- Harness Point
- CE Marked

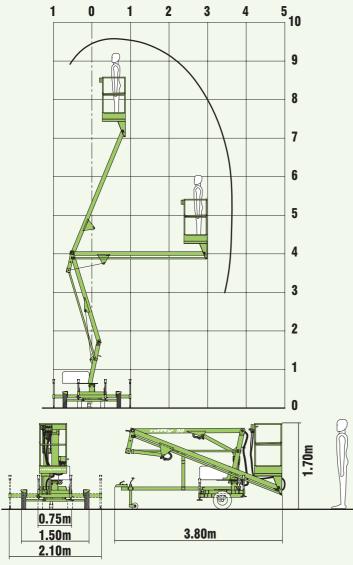

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.





The Nifty 90 has a telescopic axle allowing it to pass thorugh a 0.75m (2ft 6in) opening and a harness point in the platform for operator safety when working.


The Nifty 90's working outreach facility makes it ideal for working over racking or machinery.



SPECIFICATIONS

9.50m	31ft 2in
7.50m	24ft 7in
3.50m	11ft 6in
360°	
1.50m	4ft 11in
2.10m	6ft 11in
0.75m	2ft 6in
1.70m	5ft 7in
3.80m	12ft 5in
595kg*	1,309lbs*
120kg	265lbs
0.60m x 0.60m	2ft x 2ft
Fully Proportional Hydraulic	
Mains Only	
Battery Only	
	7.50m 3.50m 3.50m 3.60° 1.50m 2.10m 0.75m 1.70m 3.80m 595kg* 120kg 0.60m x 0.60m Fully Proportional H

^{*} Weights may vary according to specification / power options, please confirm before ordering.

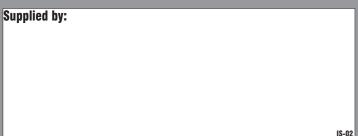

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.



NIFTYLIFT LTD Fingle Drive Stonebridge **Milton Keynes** MK13 OER **England** www.niftylift.com

e-mail: info@niftylift.com Tel.: +44 (0) 1908 223456 Fax.: +44 (0) 1908 312733