

Specs.

DESCRIPTION


MODEL

	AT46	
Max. Working Height	14 m	
Max. Platform height	12.2 m	
Max. Outreach	8.2 m	
Load Capacity	165 Kg	
Length	6.1 m	
Width	1.8 m	
Height	2.5 m	
Wheels over outriggers	2.4 m	
Slew angle	360° cont.	
No. of hyd. cylinders	4	
Platform size	0.75 x 1.1 m	
Guard rails	1.1 m	
Toeboards	0.15 m	
Diesel Engine	Perkins 412 19.5 h.p. at 2200 r.p.m. or Isuzu TS2 20.5 h.p. at 2500 r.p.m.	
Travel Speeds	1	4.8 kph / 3.0 mph
	2	11.4 kph / 7.1 mph
	3	21.0 kph / 13.1 mph
	Rev	5.4 kph / 3.4 mph
Capacities: Fuel	230	
Hydraulic oil	760	
Tyres: Front	7.50 x 16 x 8 ply TRACTOR IMPLEMENT	
Rear 2 WD	6.40 x 15 x 8 ply TRAILER IMPLEMENT	
Rear 4 WD	7.50 x 16 x 8 ply TRACTOR IMPLEMENT	

STANDARD FEATURES:

- * Lateral levelling to 7 1/2°
- * Longitudinal levelling to 4°
- * Safety lock valves on all hydraulic cylinders
- * Dual platform levelling rods
- * Base emergency lowering valves
- * Emergency hand pump and manual slewing
- * Boom support and lock for travelling
- * Fully proportional hydraulic controls
- * Outrigger controls at driving position
- * Chassis level indicator at driving position

AT46

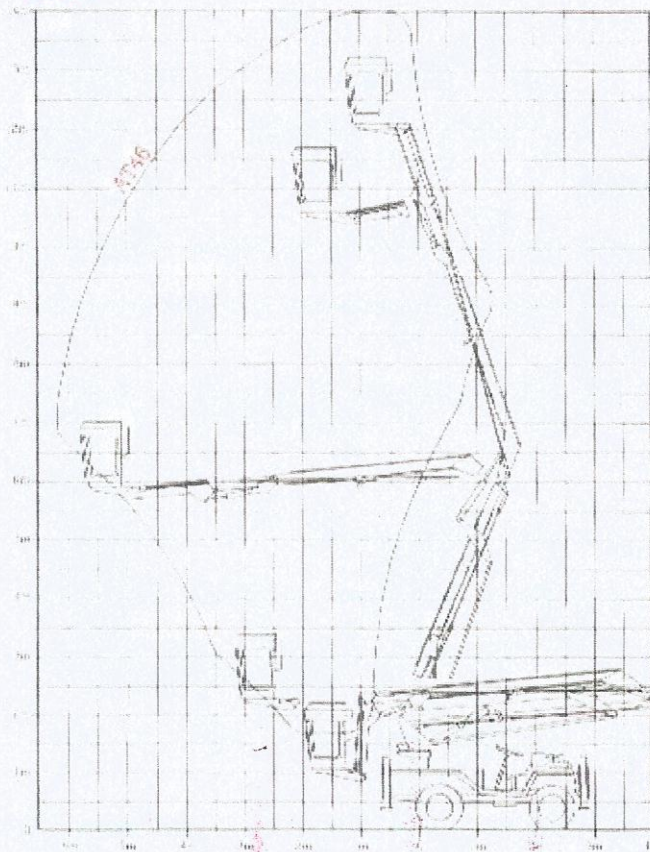

In line with our policy of improving and developing products at the earliest opportunity, details in this leaflet are subject to alteration and illustrations should be taken as approximate.

OPTIONAL ITEMS

- * Electric starting
- * Hydraulic safety interlocks for boom and outrigger operation
- * Four wheel drive
- * Road lights and equipment
- * Flashing or rotating beacons
- * 110 volt or 240 volt A.C. auxiliary power systems
- * 24 volt D.C. auxiliary power system
- * Remote engine stop/start
- * Emergency lowering controls at platform
- * Boom controls at base