

UpRight

SL-14



SELF-PROPELLED LIFT

- Designed to pass easily through small doorways and entrances.
- Transportable in standard passenger elevators.
- Extra tight turning radius allows Lift to manoeuvre well in congested areas.
- Large working platform provides 660 lb. (300 kg) capacity at 20 ft. (6.1m) working height.
- Roll out deck for greater overreach.
- Proportional control for ease of operation.

Tight turning radius makes the SL-14 the best choice for crowded retail aisles.



Compact SL-14 fits easily into small elevators or narrow doorways.

Roll out deck increases available work space on aerial lift platform to more than 8 ft. (2.49 m).

SL-14

SELF-PROPELLED LIFT

FEATURES AND SPECIFICATIONS


- Working height: 20 ft. (6.1 m)
- Platform height: maximum: 14ft. (4.3 m)
minimum: 3 ft. (90 cm)
- Platform size, inside toeboards:
standard 25.75 in. x 59 in. (65 cm x 1.5 m)
with extension 23.25 in. x 98 in. (59 cm x 2.49 m)
- Maximum platform capacity:
standard 660 lbs. (300 kgs)
with extension 550 lbs. (250 kgs)
- Lift speed, fully elevated: 23.51 seconds
- Drive speeds: high speed 2.53 mph (4.2 kph)
low speed .75 mph (1.2 kph)
- Gradeability: 25% (14 degree)
- Drive: dual front wheel with hydraulic motors
- Turning radius: 18 in. (50 cm) inside;
72 in. (1.8 m) outside
- Weight: 2100 lbs. (953 kgs)
- Overall lowered height, adjustable guardrail
installed 76-80 in. (1.9-2 m)
- Overall width: 28.75 in. (73 cm)
- Overall length: 64.25 in. (1.63 m)
- Two wheel parking brake, spring applied, hydraulic
released
- Tyres: 14 in. (35.6 cm) diameter, solid rubber,
non-marking
- Energy source: 24V battery pack (4-220 ampere
hour batteries), 4HP DC electric motor
- Battery charger: 25 amp fully automatic with ammeter
- Guardrail height (from deck): 40-44 in. (102-112 cm)
- Toeboards: 7 in. (17.8 cm)
- Descent alarm
- A Control System: Fully proportional lift and drive
circuits and foot operated deadman switch
- Roll out deck extension
- Hour meter
- Battery condition gauge.

OPTIONAL FEATURES

- Flashing amber beacon
- Motion alarm
- Horn, push button on controller
- Wiring for AC power on platform

Meets or exceeds applicable requirements of BS. 7171- OSHA and ANSI A92.3.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's Manual for detailed instructions on the proper use and maintenance of this equipment.

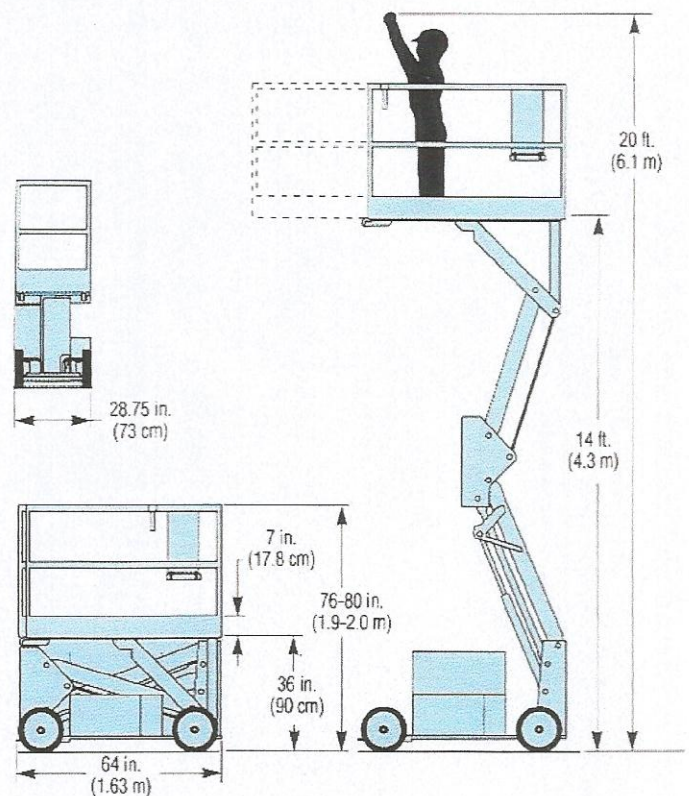

Upright also manufactures a complete line of scaffolding and other aerial work platforms. Contact your UpRight distributor for information on other products.

INSTANT ZIP-UP

Available from:

APS

Access Platform Sales Ltd

Leewood Business Park, Upton, Huntingdon, PE28 5YQ
Tel: +44 (0) 1480 891251 Fax: +44 (0) 1480 891162
Website: www.accessplatforms.co.uk
Email: sales@accessplatforms.co.uk