

UpRight

UL20/25

32/40

personnel lifts

telescopic mast

Patented Girder Lock
telescopic mast system feels
solid and sturdy

Ground level entry

Choice of platform heights

Small footprint allows set up
in narrow aisles, tight spaces

Fast set-up increases
productivity

EZ Loader system for
transporting by pick-up truck

Tilt-back system allows
passage through
standard doorways

AC or DC power

Five year
structural warranty



Photograph shown CE model

specifications	UL20	UL25	UL32	UL40
working height (A)	25ft. 5ins. (7.8m)**	31ft. (9.6m)**	38ft.(11.72m)**	46ft. (14.15m)**
platform height - (max.) (B)	19.5ft. (5.8m.)	25ft. (7.6m.)	32ft. (9.72m.)	40ft. (12.15m.)
platform height - (lowered) (C)	34.5ins. (0.87m.)	n/a	n/a	n/a
platform capacity	350lbs. (159kg.)	350lbs. (159kg.)	300lbs. (136kg.)	300lbs. (136kg.)
platform size	22ins. x 26ins. (0.56m. x 0.66m.)	26ins. x 26ins. (0.66m. x 0.66m.)	26ins. x 26ins. (0.66m. x 0.66m.)	26ins. x 26ins. (0.66m. x 0.66m.)
stowed dimensions: width (G)	29ins. (0.74m.)	29ins. (0.74m.)	29ins. (0.74m.)	29ins. (0.74m.)
height (C)	78ins. (1.98m.)	78ins. (1.98m.)	99.5ins. (2.53m.)	114ins. (2.90m.)
length (D)	45ins. (1.14m.)	49.5ins. (1.26m.)	52.5ins. (1.32m.)	52.5ins. (1.32m.)
tilted back: height (E)	n/a	74.75ins. (1.90m.)	72.75ins. (1.85m.)	79ins. (2.00m.)
length (F)	n/a	102ins. (2.59m.)	107ins. (2.72m.)	120ins. (3.05m.)
outrigger footprint width x length (J x H)	55ins. x 53ins. (1.40m. x 1.35m.)	59ins. x 56ins. (1.50m. x 1.43m.)	81ins. x 78ins. (2.06m. x 1.99m.)	92ins. x 89ins. (2.34m. x 2.26m.)
wall / corner access	0ins./14.5ins. (0m/0.37m)	n/a	n/a	n/a
wall access - distance from front of platform to wall	n/a	4ins. (102mm.)	14ins. (356mm.)	20ins. (508mm.)
weights: AC	646lbs. (293kg.)	770*lbs. (349kg.)	920lbs. (417kg.)	990lbs. (449kg.)
weights: DC	722lbs. (327kg.)	810*lbs. (367kg.)	960lbs. (435kg.)	1,030lbs. (467kg.)
guardrail height	43.5ins. (1.1m.)	43.5ins. (1.11m.)	43.5ins. (1.11m.)	43.5ins. (1.11m.)
toeboard height	6ins. (152mm.)	6ins. (152mm.)	6ins. (152mm.)	6ins. (152mm.)
power source	AC electric motor 110V, 60Hz DC electric motor 12V battery Grp.27 105 amp/hours	AC electric motor 1 hp single phase 110/220V, 50/60Hz DC electric motor 12V battery, Grp.27 105 amp/hours		
battery charger	Automatic 110V, 60Hz	Automatic 110V, 60Hz	Automatic 110V, 60Hz	Automatic 110V, 60Hz

*AC with tilt back 840 lbs. (381kg.) ; DC w/tilt back 880 lbs. (399kg.)

**Working height in the U.S. is 6 ft. above platform height. Metric working height is 2m above platform height.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance of this equipment.

standard features

- Tiltback mechanism
(UL 32/40 models only)
- Outrigger interlock indicators
- Power to platform
- Integrated battery charger
(DC only)
- 1 year parts/service
- 5 year structural warranty

options

- Laser locator
- Power to platform
- Canvas bag for fluorescent tubes
- Tool tray
- Narrow cage
- Short cage
- Auditorium kit
- Special paint colors
- Environmental green oil

UpRight

GLOBAL PROVIDER OF ACCESS SOLUTIONS

MANUFACTURING

North America
Tel +1 (559) 662 3900
Fax +1 (559) 673 6184

Europe
Tel + 353 1 620 9300
Fax + 353 1 620 9301

SALES

USA / The Americas
Tel +1 (559) 662 3900
Fax +1 (559) 673 6184

Europe/Africa/M. East
Tel + 44 (0) 1952 685 200
Fax + 44 (0) 1952 685 255

France
Tel + 33 130 37 05 44
Fax + 33 130 37 63 68

Germany
Tel + 49 2103 98950
Fax + 49 2103 989549

Singapore
Tel + 65 6324 1322
Fax + 65 6225 5157


Australia
Tel + 61 2 9748 6200
Fax + 61 2 9748 6255

P. R. China
Tel + 86 21 63390190
Fax + 86 21 63390191


Japan
Tel + 81 3 5765 6841
Fax + 81 3 5765 6840

www.upright.com
e-mail: marketing@upright.com






UL20/25/32/40

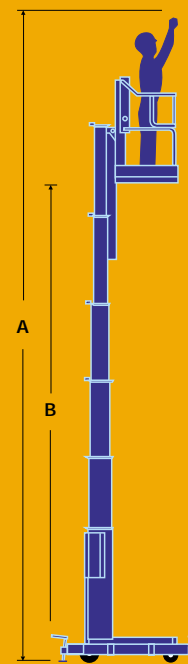

UL20

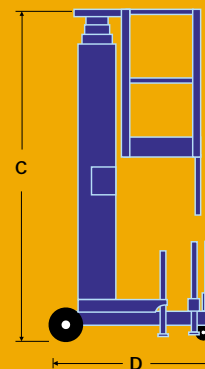

UL25/32/40

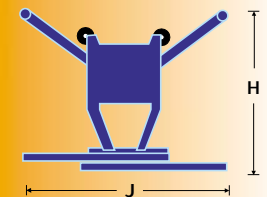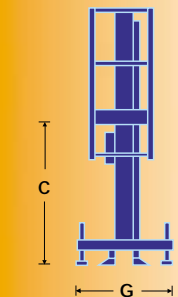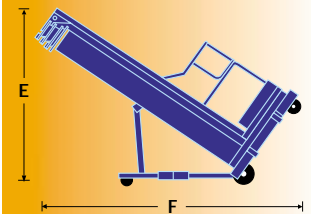

manufactured by

UpRight

Meets or exceeds applicable requirements of OSHA and ANSI A92.3 - 1990.



This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

