

# nifty



## **SD170**

### **SELF DRIVE ACCESS PLATFORM**



**17.10m (56ft)**  
Working height

**8.70m (28ft in)**  
Working outreach

**Weight Saving Design**  
Lower cost transportation &  
better fuel economy on site

**Telescopic Upper Boom**  
Greater accuracy when  
positioning the platform

**Bi-Energy Available**  
Optimises utilisation

**Hydraulic Outriggers**  
Quick & easy to set up

**Fully Proportional  
Hydraulic Controls**  
Simple, reliable &  
easy to maintain

**Platform Rotation**  
Better access to applications



**niftylift.com**




# nifty SD170

The Nifty **SD170** combines the best of our self-propelled and trailer mounted ranges. It offers the same staggering reach capabilities as the **Nifty 170** but with the versatility of a robust yet very lightweight drivable base. This allows the operator to manoeuvre, set up and operate this machine without leaving the platform, especially on uneven surfaces.

## SAFETY FEATURES

- CE Mark
- Pressure sensitive outriggers
- Audible & visual alarms
- Dual controls (platform & base)
- Manual descent with hand-pump
- Lock valves on all hydraulic cylinders




The **SD170's** outstanding reach makes it ideal for construction site work.

Also available trailer mounted. See **Nifty 170** specification sheet.



Rough terrain tyres as standard and the 4WD option allow the **SD170** to manoeuvre easily over a wide range of site conditions.

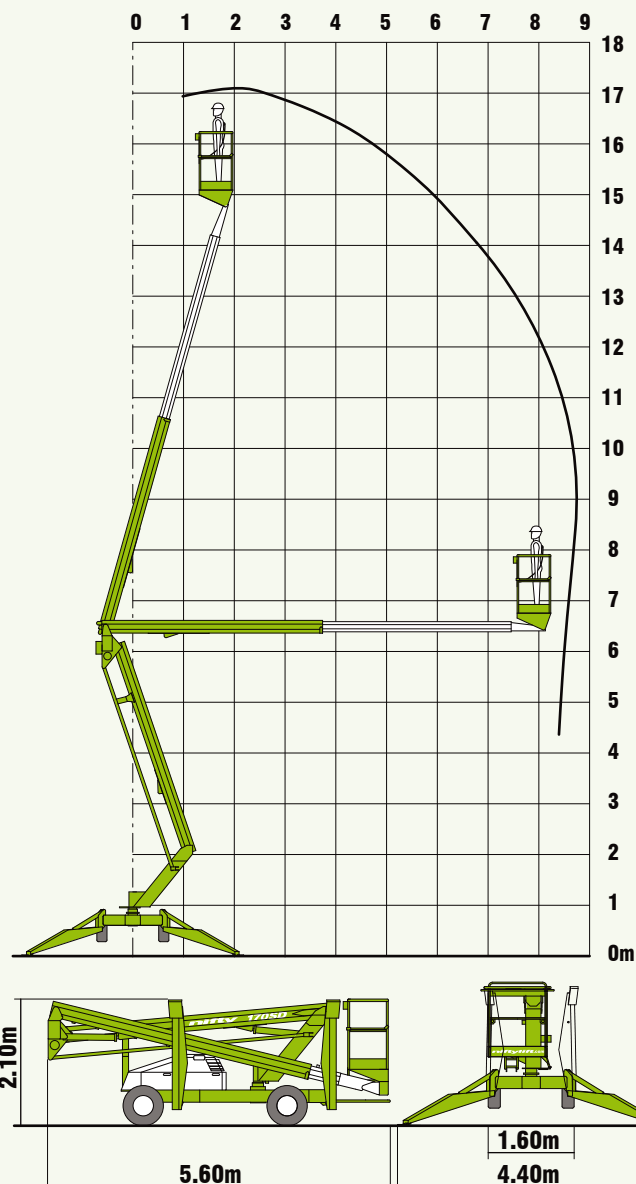

## SPECIFICATIONS

<b>Working Height</b>	17.10m	56ft
<b>Platform Height</b>	1.10m	49ft 6in
<b>Working Outreach</b>	8.70m	28ft 6in
<b>Slew</b>	360°	
<b>Width - Travelling</b>	1.60m	5ft 3in
<b>- Working</b>	4.40m	14ft 5in
<b>Height</b>	2.10m	6ft 11in
<b>Length</b>	5.60m	18ft 4in
<b>Minimum Weight</b>	2750kg*	6000lbs*
<b>Turning Radius - Outside</b>	5.20m	17ft
<b>Platform Rotation</b>	100°	
<b>Platform Capacity</b>	200kg	440lbs
<b>Platform Size</b>	1.10m x 0.65m	3ft 7in x 2ft 2in
<b>Drive Speed</b>	5.0kph	3.1mph
<b>Gradeability</b>	25% (2x4)	30% (4x4)
<b>Control System</b>	Fully Proportional Hydraulic	
<b>Power Options</b>	Battery Only Petrol or Diesel Only Bi-Energy (Engine and Battery)	

\* Weights may vary according to specification / power options, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

**NIFTYLIFT LTD**  
Fingle Drive  
Stonebridge  
Milton Keynes  
MK13 0ER  
England  
www.niftylift.com  
e-mail: info@niftylift.com  
Tel.: +44 (0)1908 223456  
Fax.: +44 (0)1908 312733

