

nifty

V100

VEHICLE MOUNTED ACCESS PLATFORM

10.80m (35ft 5in)
Working Height

4.30m (14ft 1in)
Working Outreach

**Fully Proportional
Hydraulic Controls**
Designed for maximum
operator efficiency

Fibreglass Platform
1000v insulation for operators

Safety Interlocks
Prevent vehicle being driven
when boom is raised

**Stabiliser Width
Only 1.70m**
Allows easy set up near kerbs



niftylift.com



nifty V100


The Nifty V100 offers unparalleled performance at a low cost without compromising on quality or specification. It combines the benefits of impressive working height and outreach, with the ability to work in restricted areas due to its narrow stabiliser width. Operation and maintenance are simple, making the V100 both versatile and economical in any environment.

Safety Features

- ▶ Dual controls (platform & base)
- ▶ Emergency descent system with hand-pump
- ▶ Lock valves on all hydraulic cylinders
- ▶ Pressure sensitive stabiliser microswitches
- ▶ Safety interlocks
- ▶ CE Mark



Designed for low maintenance with all components easily accessible, the Nifty V100 minimises costly downtime. It is fast to set up and easy to use making it one of the most versatile vehicle mounts available.

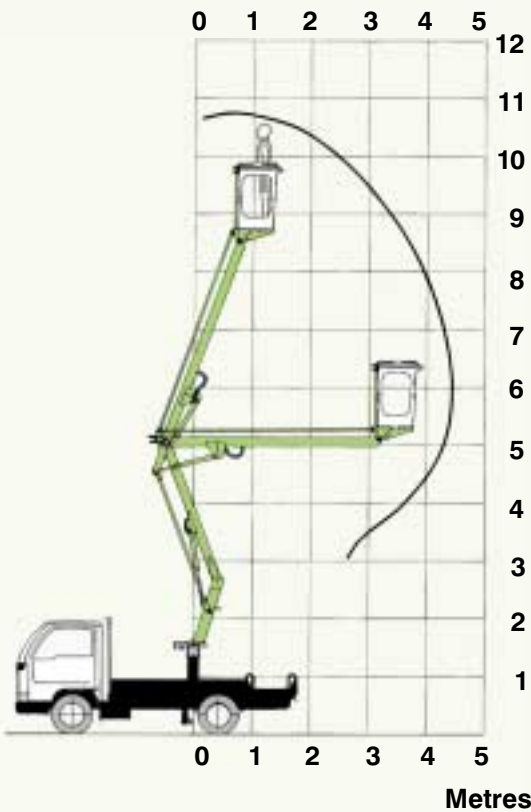

Specifications

Working Height	10.80m	33ft 5in
S.W.L.	200kg	440lbs
Working Outreach	4.30m	14ft 1in
Weight	2900kg [Noml]	2 ton 17 cwt
	3400kg [GVW]	3 ton 8 cwt
Usable Payload	500kg	10 cwt
Width	Transit 1.70m	5ft 7in
	Jacked 1.70m	5ft 7in
Height Closed	2.84m	9ft 4in
Length Closed	4.85m	15ft 11in
Platform Size	1.10 x 0.70m	3ft 7in x 2ft 4in
Control Systems	Fully proportional hydraulic controls	
Power	Electrically engaged power-take-off system, directly driving full flow gear pump	
Emergency Operation	12v D.C. power pack for emergency descent Ground controls permitting platform recovery	
Vehicle Controls	Engine stop/start from platform	
Interlocks	Full platform/stabiliser jack reverse interlocking Vehicle, P.T.O. audible & visual alarm	

Due to a policy of continuing development and improvement Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms

Niftylift Ltd

Fingle Drive
Stonebridge
Milton Keynes
MK13 0ER
England

www.niftylift.com

e.mail: info@niftylift.com

Tel: +44 (0)1908 223456

Fax: +44 (0)1908 312733

