

# TRAILER MOUNTED ACCESS PLATFORM



9.5m (31ft 6in) Working height

3.5m (11ft 6in) Working outreach

## Fully Proportional Hydraulic Controls

Simple, reliable & easy to maintain

### **Compact Outriggers**

For setup in confined areas

#### Weight Saving Chassis Design

Easily towed on the road & manoeuvred on site

#### **Telescopic Axle**

Access through narrow openings & doorways













The **Nifty 90** is the ideal alternative to ladders and scaffolds. Its compact design allows it to be set up in the most confined spaces. The telescopic axle allows it to pass through narrow openings and its simple, reliable hydraulic controls make even first time operation straightforward.

#### **SAFETY FEATURES**

- Pressure sensitive outriggers
- Audible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Hand Brake
- Harness Point
- CE Marked

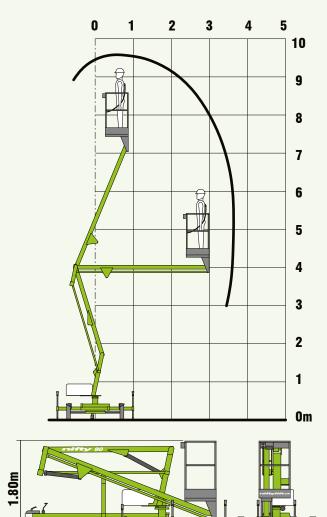

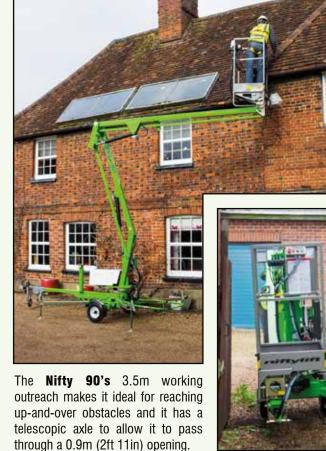

SPECIFICATIONS

Working Height	9.5m	31ft 6in
Platform Height	7.5m	24ft 6in
Working Outreach	3.5m	11ft 6in
Slew	360°	
Width- Axles Retracted	0.9m	2ft 11in
- Axles Extended	1.4m	4ft 7in
- Working	2.1m	6ft 11in
Height	1.8m	5ft 11in
Length	4.25m	13ft 11in
Weight	695kg*	1,530lbs*
Platform Capacity	120kg	265lbs
Platform Size	0.6m x 0.6m	2ft x 2ft
Control System	Fully Proportional Hydraulic	
Power System	Mains Only	
	Battery Only	

<sup>\*</sup> Weights may vary according to specification / power options, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.



4.25m

0.90m

1.40m 2.10m

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.





NIFTYLIFTY LTD Fingle Drive Stonebridge Milton Keynes MK13 OER England www.niftylift.com

email: info@niftylift.com Tel.: +44 (0) 1908 223456 Fax.: +44 (0) 1908 312733